HF-AMP1
Addressable Manual Call Point




The addressable manual call poiint is a field component in the fire alarm system. The device is installed in a public place, when a fire occurs, the manual manually press the starting part to trigger the fire alarm signal.

- Two-wire, convenient for construction wiring.
- Using resettable operating panel, reset by special key.
- Each mounting base contains a reset key, which can be used on demand.

▪ Specification

Bus Parameters	
Wiring requirements	RVS 2*1.5 mm² Flame Retardant Wire, Max distance: 1000 m
General	
Weight	99 g
Main Power Supply	DC 24 V （DC 18 V～DC 28 V）
Indicator	2 Red, 1 for Fire Alarm
Wiring	1 is for L+, 2 is for L-, 3 is for PHONE+, 4 is for PHONE-
Reset mode	Special key manual reset
Material	ABS
Monitor Current	≤ 200 μA
Alarm Current	≤ 0.3 mA
Product Dimension	L 86 mm * W 86 mm * H 34 mm (with base)
Alarm Mode	Manually press the starting part

▪ Dimension

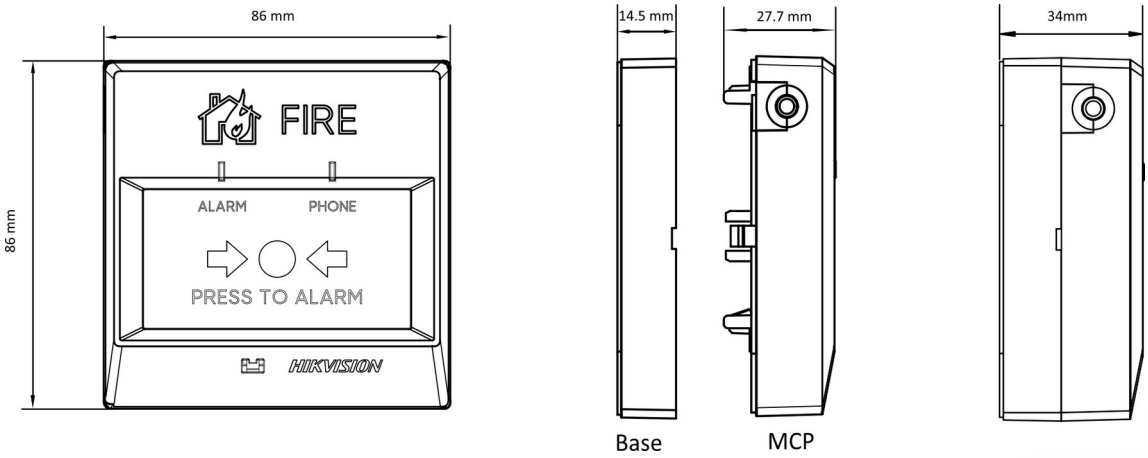

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®